


High Power Stereo Series

2 x 500Watt 4 Ohm

Class D

Audio Amplifier Board - IRS2092

(AA-AB32511)

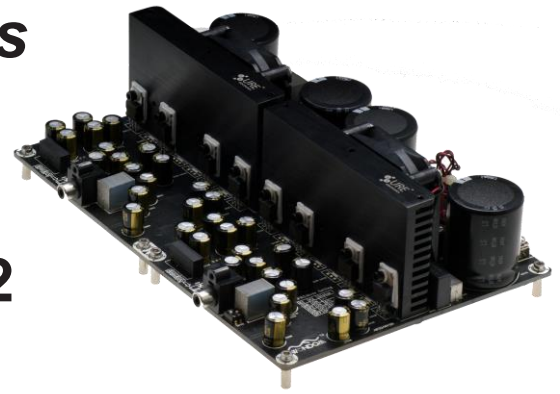

Key Features:

- Output Power
500W@4ohm $\pm 60V$ DC THD+N 10%
405W@4ohm $\pm 60V$ DC THD+N 1%
- Power and Shutdown Indicator
- Overcurrent Protection
- Overtemperature Protection
- BTL and Stereo Mode Switchable
- Optimized Heatsink Design
- Temperature Control Fan
- Weight: 850g/ 1.87 lbs ($\pm 10\%$)
- Size: 6.00 x 4.50 x 2.50 inches

Electrical Specifications

Specifications typical @ +25°C, powered by $\pm 60V$ DC, unless otherwise noted. Specifications subject to change without notice.

Parameter	Conditions	Min.	Typ.	Max.	Units
Power Supply	-	± 55	± 60	± 65	VDC
Idle Power	SD Floating, FAN ON	-	7.7	10	W
	SD Floating, FAN OFF	-	6.1	8	W
Standby Power	SD Connected to GND, FAN OFF	-	1.3	4	W
Maximum Current	1000W @4Ohm	-	18	-	A
Efficiency	500W @4Ohm	90	-	95	%
Minimum Load Impedance	-	-	1	-	Ω
Switching Frequency	SD Floating	-	396	-	KHz
Under Voltage Protection	-	-	± 50	-	V
Over Voltage Protection	-	-	± 70	-	V
Over Temperature Protection	-	-	100	-	°C

Distributors:



HOBBYHIFILADEN



All these boards are per-tested with our power supply solution to comply with FCC and CE. For all customers who need those information, please contact our distributor or Sure Electronics. RoHS compliant will need an MOQ of 1000pcs per order.

Ready for:



Contact info

• Email:
info@sure-electronics.com







Audio Performance

Specifications typical @ +25°C, powered by $\pm 60V$ DC, unless otherwise noted. Specifications subject to change without notice.

Parameter	Conditions	Min.	Typ.	Max.	Units
Gain	-	28	30	32	dB
Input Sensitivity(RMS)	@4 Ω , 500W, 1KHz	-	1.44	-	V
Input Impedance	-	-	3.3	-	K Ω
Output Power	@4 Ω THD+N 1% @4 Ω THD+N 10%	-	405 500	-	W
Bandwidth @ $\pm 3dB$	@4 Ω	20	-	20K	Hz
THD	@4 Ω , 1W, 1KHz @4 Ω , 10W, 1KHz	-	0.029 0.036	-	%
Output Noise Level	A-weighting, Input Connected to GND	-	236	-	μV
SNR	405W @4 Ω THD+N 1%	-	97	-	dB

Typical Performance Graphs

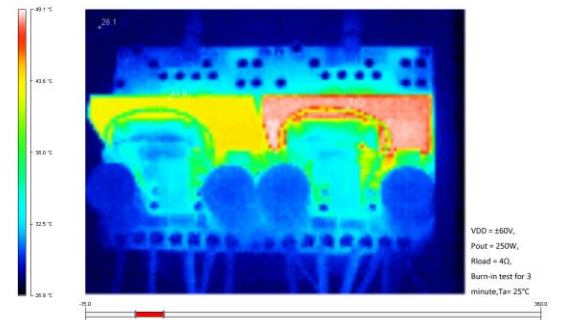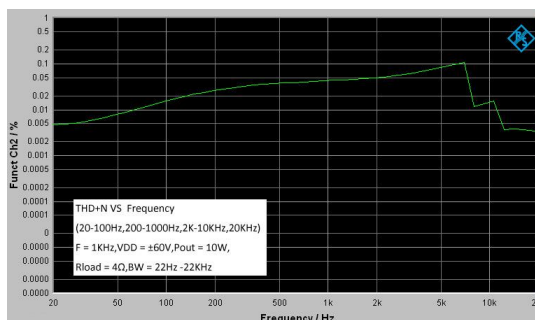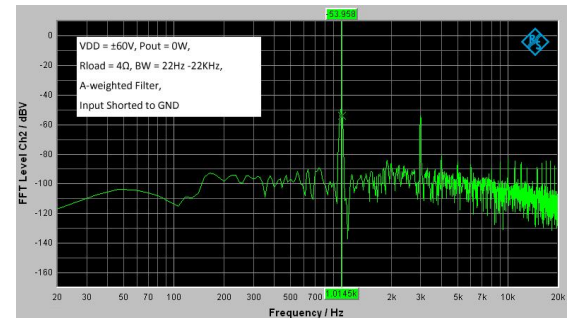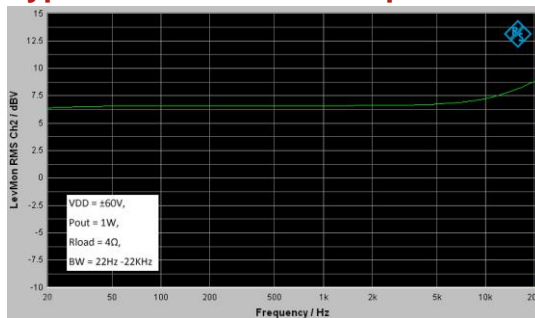

All parameters were tested with Rohde & Schwarz UPV audio analyzer (AES17 filter enabled) and Audio Precision AUX0025 filter. For authorized distributors and OEM customers who need more detailed performance graphs and parameter settings, please send an inquiry e-mail to us. (Not available for retail customers)


Model Selection Guide

Model Number	Output Power	Power Supply Range	Typical Load	Amplifier IC	Dimensions
AA-AB31512	1 X 500Watt	±55-±65V	4Ω	IRS2092	6"X4.5" #1
AA-AB31431	1 X 750Watt	±55-±75V	4Ω	IRS2092	6"X4.5"
AA-AB31391	1 X 1000Watt	±55-±65V	2Ω	IRS2092	6" X 4.5"
AA-AB31411	1 X 1500Watt	±55-±75V	2Ω	IRS2092	6" X 4.5"
AA-AB31381	1 X 2000Watt	±55-±85V	2Ω	IRS2092	6" X 4.5"
AA-AB31491	1 X 2500Watt	±55-±95V	2Ω	IRS2092	6" X 4.5"
AA-AB31341	1 X 3000Watt	±55-±85V	4Ω	IRS2092	9" X 6" #2
AA-AB32321	2 X 125Watt	±55-±75V	8Ω	IRS2092	5.7" x 4" #3
AA-AB32291	2 X 250Watt	±60-±80V	8Ω	IRS2092	5.7" x 4"
AA-AB32511	2 X 500Watt	±55-±65V	4Ω	IRS2092	6"X4.5"
AA-AB32431	2 X 750Watt	±55-±75V	4Ω	IRS2092	6"X4.5"
AA-AB32391	2 X 1000Watt	±55-±65V	2Ω	IRS2092	9"X6"
AA-AB32411	2 X 1500Watt	±55-±75V	2Ω	IRS2092	9"X6"
AA-AB32381	2 X 2000Watt	±55-±85V	2Ω	IRS2092	6"X9"
AA-AB32491 ^{1,2}	2 X 2500Watt	±55-±95V	2Ω	IRS2092	6"X9"

Notes:

- The output power is rated at the condition THD+N 10%, 1kHz sine wave.
- All amplifier boards don't employ power supply reverse polarity protection. Stresses beyond the power supply range maximum ratings may cause permanent damage.
- None typical load may cause rating power reduction.
- Dimensions mean length and width of PCB only, excluding excessive part out of the PCB outline.
- If any model within product series is out of stock, another model with compatible size and function, featuring more rating output power will be sent as the substitute without notice.
- All parameters were tested with Rohde & Schwarz UPV audio analyzer (AES17 filter enabled) and AP AUX0025 filter. Linear Power Supply units were used for testing.
- Sure Electronics promises all standard products life cycle more than 5 years. Sure Electronics reserves the right to update the version without notice. All the products sent to retail customers are the latest version. We will provide back-to-order service (100 Pieces MOQ needed) for our distributors in 5 years.
- Suggested power supply solution:
1000VA Hand Made Toroidal Transformer (PS-RT11111)
20A/100V 12,000Uf Rectifier Board (AA-AB41121)
Please kindly be noticed that the board needs dual power supplies. If you have other power supply requirements, please feel free to contact us.

Mechanical Dimensions

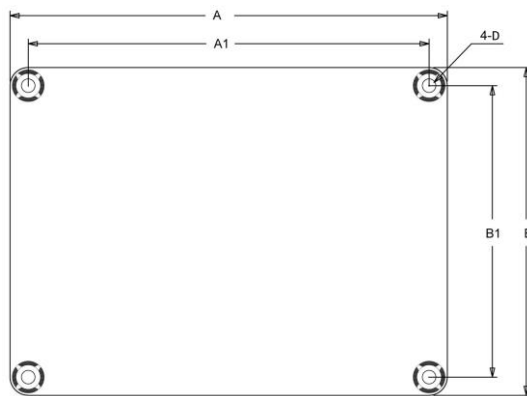


Dimensions	A (inch/mm)	A1 (inch/mm)	B (inch/mm)	B1 (inch/mm)	D (inch/mm)
#1	6.00/152.40	5.60/142.24	4.50/114.30	4.10/104.14	0.15/3.8
#2	9.00/228.6	8.60/218.44	6.00/152.40	5.60/142.24	0.15/3.8
#3	5.7/144.78	5.3/134.62	4/101.6	3.6/91.44	0.14/3.6

Notes:

- All dimensions are typical in inches/ mm
- Tolerance x.xx = ±0.02(±0.50)
- Height: 2.50inch/ 63.5mm

Connections

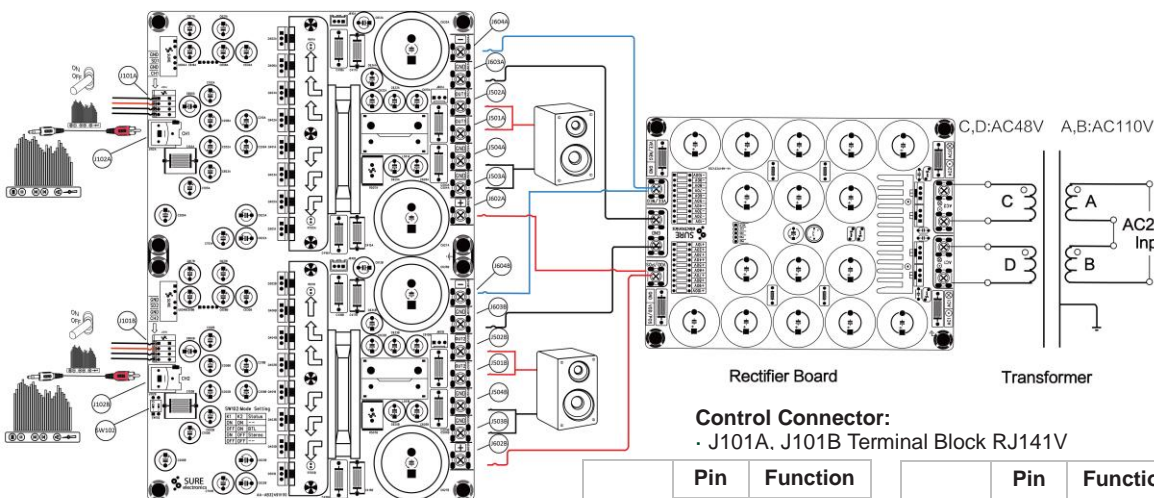

Control Connector:

- J101A, J101B Terminal Block RJ141V

Pin	Function
■	GND
●	SD2
●	GND
●	CH2

Pin	Function
■	GND
●	SD1
●	GND
●	CH1

Power Supply Connector:

- J602A, J603A, J604A, J602B, J603B, J604B Terminal Block

Pin	Function
J602A, J602B	+
J604A, J604B	-
J603A, J603B	GND

Audio Input Connector:

- J102A, J102B RCA Jack

Mode Setting Switch:

- SW102

K1	K2	Status	Function
OFF	ON	BTL	Mono Mode
ON	OFF	Stereo	Stereo Mode

Speaker Output Connector:

- J501A, J502A, J503A, J504A, J501B, J502B, J503B, J504B Terminal Block RJ128

Pin	Function
J501A, J502A	OUT1
J503A, J504A	GND
J501B, J502B	OUT2
J503B, J504B	GND



Sure Electronics

Make Your Audio Application Simple!

NO.9, Weidi Road, Xianlin University City, Qixia District,
Nanjing, Jiangsu Province, P.R.C

www.sure-electronics.com

www.wondom.com

Mail: store@sure-electronics.com

Skype: surewebstore